


AUFBAUANLEITUNG

P&H 670 WLC


- 1** Mit den mitgelieferten Schrauben und Muttern montieren Sie zuerst den Ausleger.
Benutzen Sie dazu die beiliegenden Werkzeuge.

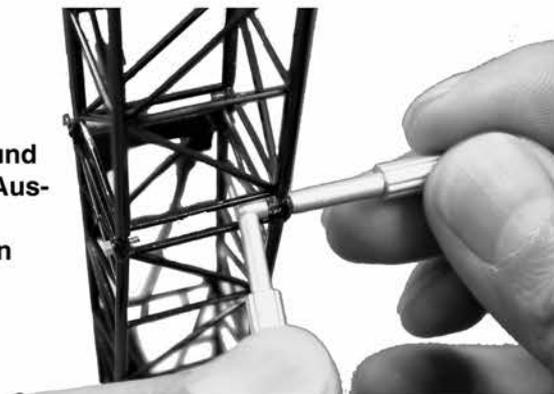

- 2** Verschrauben Sie anschließend die Auslegerhalteseile an Flaschenzug und Ausleger.



- 3** Führen Sie das Seil der hinteren Winde über eine der Rollen des Auslegerkopfes.

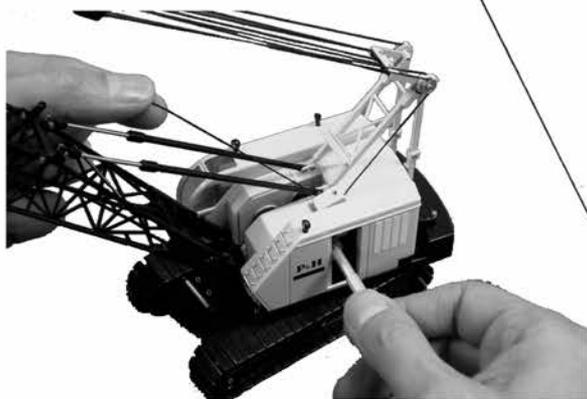

- 4** Befestigen Sie dieses Seil an der Umlenkrolle der Schlepplachse.




- 5** Als letzten Schritt führen Sie das Seilende der vorderen Winde durch die Lasche der Zugöse und verknöten Sie das Ende mit einem Doppelknoten.



Kranversion

Führen Sie beide Seile über die Rollen des Auslegerkopfes und verknöten Sie die Enden mit je einem Haken.



Seileinscherung




Wir wünschen Ihnen viel Freude mit Ihrem neuen Modell.

NZG-Modelle GmbH

Sigmundstrasse 147

90431 Nürnberg


Germany




erection instruction

P&H 670 WLC

- 1** With the provided screws and nuts you assemble first the boom.
Use for this the enclosed tools.

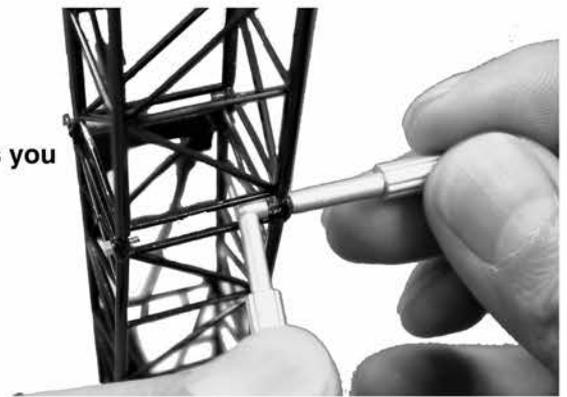

- 3** Lead the rope of the rear winch across one of the rolls of the boom head.

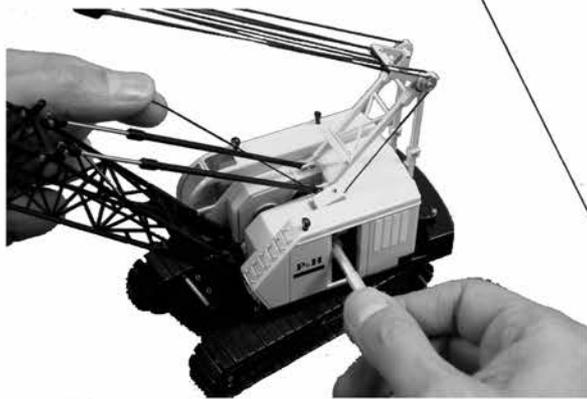

- 2** Bolt afterwards the holding ropes for the boom at pully-block and boom.



- 4** Fasten this rope to the deflection roller of the drag shovel.




- 5** As last step you lead the rope end of the front winch through the latch of the towing eye and fasten the end with a double knot.



crane version

Lead both ropes across the rolls of the boom head and fasten each end with a hook.

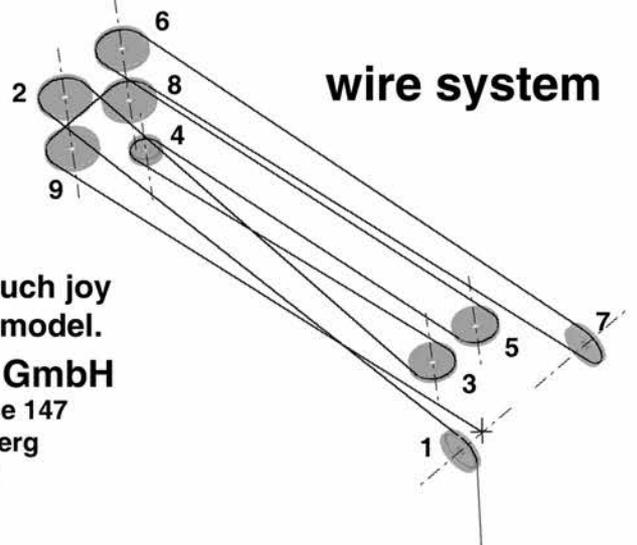

We wish you much joy
with your new model.

NZG-Modelle GmbH
Sigmundstrasse 147
90431 Nürnberg
Germany

